



velo AUTOMATIC ELECTRONIC HAND DRYER

- Automatic electronic hand dryer.
- Model for mounting on the surface.
- Stainless steel sheet housing, satin finish. Also available in gloss finish (NOFER 01481.B), white finish (NOFER 1481.W), black finish (NOFER 01481.N) and other colors.
- Suitable for collectivities and designed for high traffic bathroom and continuous use.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

velo TECHNICAL DATA


- Housing made of a single piece of AISI 304 stainless steel satin finish, 1,2 mm thick.
- Electronic infrared sensor that stops the function when the hands leave the active range.
- Air temperature (room temperature of 20°C): 60 °C.
- Universal motor without brushes (maintenance not needed).
- Motor speed: 2800 r.p.m.
- Air speed: 65 km/h.
- Total power: 2050 W (optional 1200 W).
- Motor power: 110 W.
- Voltage/Frequency: 220-240 V ~ 50/60 Hz.
- Electrical isolation: Class II.
- Maximum consumption: 9 A.
- Noise level from 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 284 height x 218 width x 102 depth (mm).
- Net weight: 3,9 kg.
- Weight with individual packing: 4,3 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer will start automatically and it continues working while the hands are within the active range. The device switches off after a few seconds of removal .
- Cleaning: stainless steel needs maintenance because dust can eventually damage the chromium (Cr) content in stainless steel. We recommend monthly cleaning with a stainless steel special cleaner.
- Estimated drying time: 40 seconds. Adjustable time by potentiometer from 0 to 90 seconds.



AUTOMATIC HAND DRYER

CODE 01481.S

TECHNICAL DRAWING

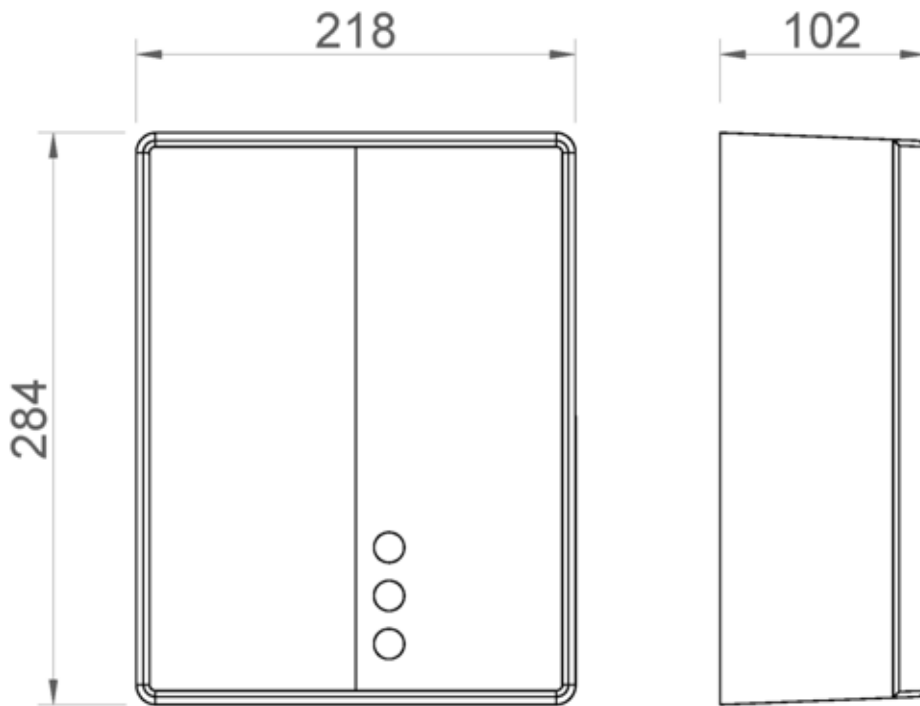

DIMENSIONS IN mm



Velo Hand Dryers
Suite 1A Level 2
802-808 Pacific Highway
Gordon NSW 2072
www.velohanddryers.com.au
sales@velohanddryers.com.au