




velo AUTOMATIC ELECTRONIC HAND DRYER

- Automatic electronic stainless steel hand dryer.
- Model for mounting on the surface.
- Stainless steel sheet housing satin finish. Also available in gloss finish (NOFER 01251.B) and white finish (NOFER 01251.W).
- Suitable for collectivities and places of high frequency of use.
- Robust, anti vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

velo TECHNICAL DATA

- Housing made of one piece satin finish of AISI 304 stainless steel (thickness=1 mm).
- Electronic infrared sensor that stops the hand dryer when the hands are removed from the detection field.
- Air temperature (environment 20°C): 50°C to 10 cm.
- Motor speed: 2800 r.p.m
- Air speed: 65 km/h.
- Air flow: 2300 l/min.
- Total power: 1500 W.
- Motor power: 110 W.
- Voltage/Frequency: 220 240 50/60 Hz.
- Electric insulation: Class II.
- Maximum consumption of 6,6 A.
- Noise level at 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 240 height x 280 width x 165 depth (mm).
- Net weight: 3,5 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer activates automatically, remaining in operation while the hands are inside the field of the sensor. The appliance switches off after a few seconds of removing them.
- Cleaning: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then dry it.
- Estimated drying time: 40 seconds. Adjustable time by potentiometer from 0 to 90 seconds.

velo TECHNICAL DRAWING

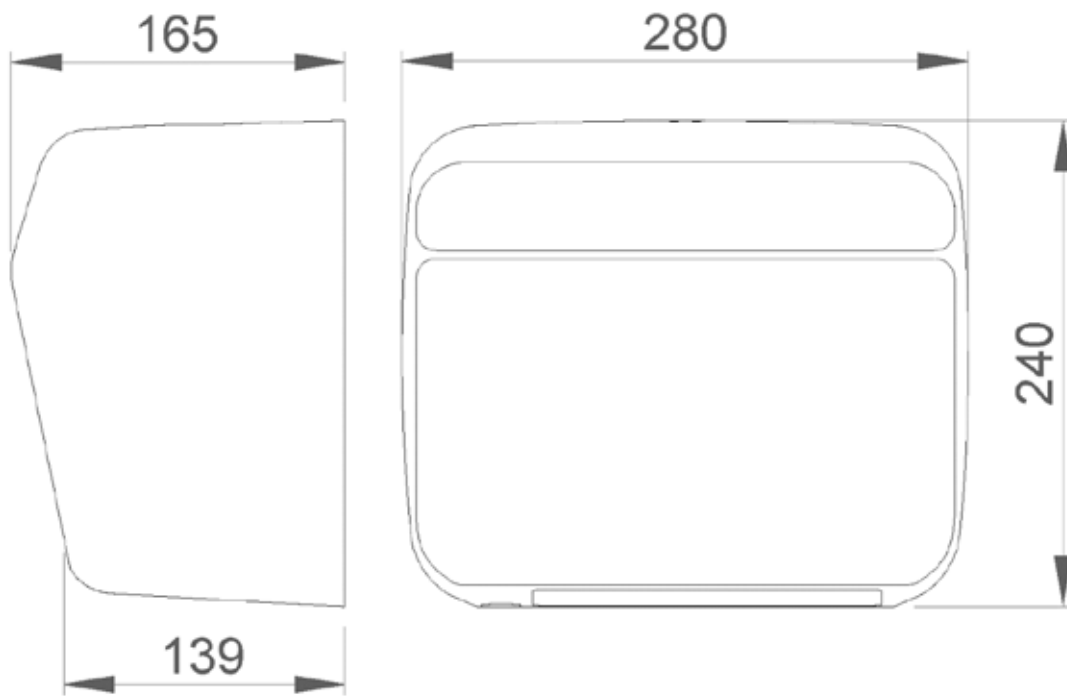

DIMENSIONS IN mm